




www.pegasustech.net

Pegasus I 5□□ series barcode scanner quick guide


- ☞ A standard packing includes a scanner, a PS2 cable and a CD (or a user manual).
- ☞ Accessories include a RS232 cable, a 5V adaptor and a USB cable.
- ☞ Use dry and soft cloth to clean the handheld unit and the base unit.

Parts of the scanner

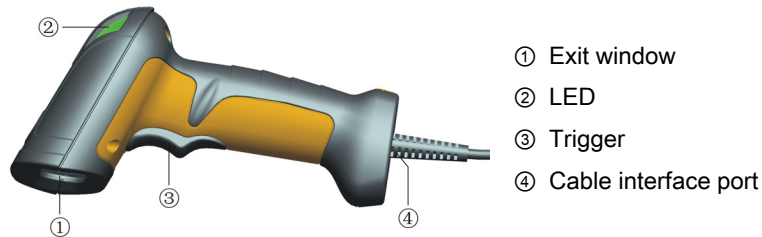

Installing the cable

1. Switch off the host;
2. Refer to the below pictures, connect the host with the scanner based on different cables;
3. Ensure that all connections are secure;
4. Switch on the host system. If installation is successful, the beeper will beep and LED will light.

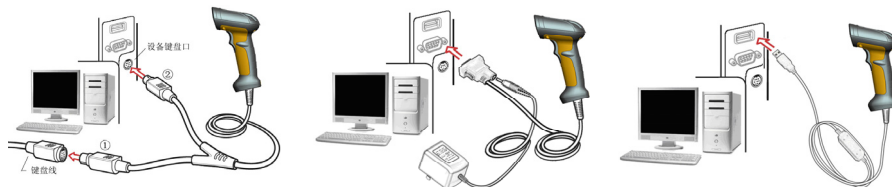

PS2 cables

RS232 cables

USB cable

Special setting




Default value initialization



Firmware version list

Programming instruction and example

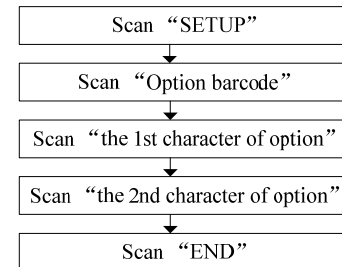

Example: to set Flow control to be XON/XOFF.

Note: 1. More details refer to User Manual; 2. For better readability, please print this document with laser print